
CSE 331

Software Design & Implementation

Dan Grossman
Spring 2015

Exceptions and Assertions

(Based on slides by Mike Ernst, Dan Grossman, David Notkin, Hal Perkins)

Outline

- General concepts about dealing with errors and failures
- Assertions: what, why, how
 - For things you believe will/should never happen
- Exceptions: what, how *in Java*
 - How to throw, catch, and declare exceptions
 - Subtyping of exceptions
 - Checked vs. unchecked exceptions
- Exceptions: why *in general*
 - For things you believe are bad and should rarely happen
 - And many other style issues
- Alternative with trade-offs: Returning special values
- Summary and review

CSE331 Spring 2015

2

Failure causes

Partial failure is inevitable

- Goal: prevent complete failure
- Structure your code to be reliable and understandable

Some failure causes:

1. Misuse of your code
 - Precondition violation
2. Errors in your code
 - Bugs, representation exposure, ...
3. Unpredictable external problems
 - Out of memory, missing file, ...

CSE331 Spring 2015

3

What to do when something goes wrong

Fail early, fail friendly

Goal 1: *Give information about the problem*

- To the programmer – a good error message is key!
- To the client code: via exception or return-value or ...

Goal 2: *Prevent harm*

- Abort: inform a human
- Perform cleanup actions, log the error, etc.

Re-try:

- Problem might be transient

Skip a subcomputation:

- Permit rest of program to continue

Fix the problem?

- *Usually* infeasible to repair from an unexpected state

CSE331 Spring 2015

4

Avoiding errors

A precondition prohibits misuse of your code

- Adding a precondition weakens the spec

This ducks the problem of errors-will-happen

- Mistakes in your own code
- Misuse of your code by others

Removing a precondition requires specifying more behavior

- Often a good thing, but there are tradeoffs
- Strengthens the spec
- Example: specify that an exception is thrown

CSE331 Spring 2015

5

Outline

- General concepts about dealing with errors and failures
- Assertions: what, why, how
 - For things you believe will/should never happen
- Exceptions: what, how
 - How to throw, catch, and declare exceptions *in Java*
 - Subtyping of exceptions
 - Checked vs. unchecked exceptions
- Exceptions: why *in general*
 - For things you believe are bad and should rarely happen
 - And many other style issues
- Alternative with trade-offs: Returning special values
- Summary and review

CSE331 Spring 2015

6

Defensive programming

Check:

- Precondition
- Postcondition
- Representation invariant
- Other properties that you know to be true

Check *statically* via reasoning and tools

Check *dynamically* via **assertions**

```
assert index >= 0;
assert items != null : "null item list argument"
assert size % 2 == 0 : "Bad size for " +
    toString();
```

- Write assertions as you write code
- Include descriptive messages

CSE331 Spring 2015

7

Enabling assertions

In Java, assertions can be enabled or disabled at runtime without recompiling

Command line:

```
java -ea runs code with assertions enabled
java runs code with assertions disabled (default)
```

Eclipse:

Select Run>Run Configurations... then add **-ea** to VM arguments under (x)=arguments tab

(These tool details were covered in section already)

CSE331 Spring 2015

8

When *not* to use assertions

Don't clutter the code with useless, distracting repetition

```
x = y + 1;
assert x == y + 1;
```

Don't perform side effects

```
assert list.remove(x); // won't happen if disabled
```

// Better:

```
boolean found = list.remove(x);
assert found;
```

Turn them off in rare circumstances (production code(?))

- Most assertions better left enabled

CSE331 Spring 2015

9

assert and checkRep()

CSE 331's **checkRep()** is another dynamic check

Strategy: use **assert** in **checkRep()** to test and fail with meaningful traceback/message if trouble found

- Be sure to enable asserts when you do this!

Asserts should be enabled always for CSE 331 projects

- We will enable them for grading

CSE331 Spring 2015

10

Expensive **checkRep()** tests

Detailed checks can be too slow in production

But complex tests can be very helpful, particularly during testing/debugging (let the computer find problems for you!)

No perfect answers; suggested strategy for **checkRep**:

- Create a static, global "debug" or "debugLevel" variable
- Run expensive tests when this is enabled
- Turn it off in graded / production code if tests are too expensive

Often helpful: put expensive / complex tests in separate methods and call as needed

CSE331 Spring 2015

11

Square root

```
// requires: x ≥ 0
// returns: approximation to square root of x
public double sqrt(double x) {
    ...
}
```

CSE331 Spring 2015

12

Square root with assertion

```
// requires: x ≥ 0
// returns: approximation to square root of x
public double sqrt(double x) {
    assert (x >= 0.0);
    double result;
    ... compute result ...
    assert (Math.abs(result*result - x) < .0001);
    return result;
}
```

- These two assertions serve very different purposes

CSE331 Spring 2015

13

Outline

- General concepts about dealing with errors and failures
- Assertions: what, why, how
 - For things you believe will/should never happen
- Exceptions: what, how
 - How to throw, catch, and declare exceptions *in Java*
 - Subtyping of exceptions
 - Checked vs. unchecked exceptions
- Exceptions: why *in general*
 - For things you believe are bad and should rarely happen
 - And many other style issues
- Alternative with trade-offs: Returning special values
- Summary and review

CSE331 Spring 2015

14

Square root, specified for all inputs

```
// throws: IllegalArgumentException if x < 0
// returns: approximation to square root of x
public double sqrt(double x)
    throws IllegalArgumentException
{
    if (x < 0)
        throw new IllegalArgumentException();
    ...
}
```

- **throws** is part of a method signature: “it might happen”
 - Comma-separated list
- **throw** is a statement that actually causes exception-throw
 - Immediate control transfer [like **return** but different]

CSE331 Spring 2015

15

Using try-catch to handle exceptions

```
public double sqrt(double x)
    throws IllegalArgumentException
    ...
```

Client code:

```
try {
    y = sqrt(...);
} catch (IllegalArgumentException e) {
    e.printStackTrace(); //and/or take other actions
}
```

Handled by nearest *dynamically* enclosing **try/catch**


- Top-level default handler: stack trace, program terminates

CSE331 Spring 2015

16

Throwing and catching

- Executing program has a stack of currently executing methods
 - Dynamic: reflects runtime order of method calls
 - No relation to static nesting of classes, packages, etc.
- When an exception is thrown, control transfers to nearest method with a *matching* catch block
 - If none found, top-level handler prints stack trace and terminates
- Exceptions allow *non-local* error handling
 - A method many levels up the stack can handle a deep error



CSE331 Spring 2015

17

Catching with inheritance


```
try {
    code...
} catch (FileNotFoundException fnfe) {
    code to handle a file not found exception
} catch (IOException ioe) {
    code to handle any other I/O exception
} catch (Exception e) {
    code to handle any other exception
}
```

- A **SocketException** would match the second block
- An **ArithmeticException** would match the third block
- Subsequent catch blocks need not be supertypes like this

CSE331 Spring 2015

18

Exception Hierarchy

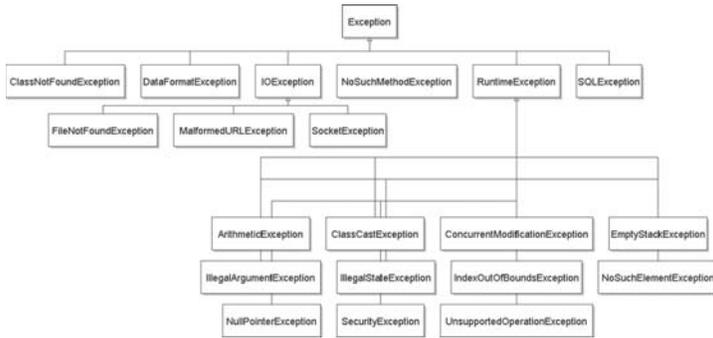

CSE331 Spring 2015

19


Java's checked/unchecked distinction

Checked exceptions (*style: for special cases*)

- Callee: *Must* declare in signature (else type error)
- Client: Must either catch or declare (else type error)
 - Even if *you* can prove it will never happen at run time, the type system does not “believe you”
- There is guaranteed to be a dynamically enclosing catch

Unchecked exceptions (*style: for never-expected*)

- Library: No need to declare
- Client: No *need* to catch
- Subclasses of **RuntimeException** and **Error**

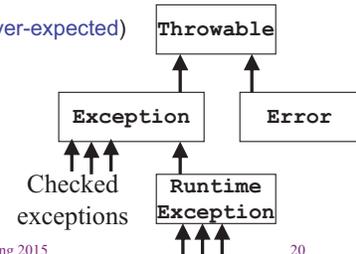

CSE331 Spring 2015

20

Checked vs. unchecked

- No perfect answer to “should possible exceptions thrown” be part of a method signature
 - So Java provided both
- Advantages to checked exceptions:
 - Static checking of callee ensures no other checked exceptions get thrown
 - Static checking of caller ensures caller does not forget to check
- Disadvantages:
 - Impedes implementations and overrides
 - Often in your way when prototyping
 - Have to catch or declare even in clients where the exception is not possible

CSE331 Spring 2015

21

The finally block

finally block is always executed

- Whether an exception is thrown or not

```
try {
    code...
} catch (Type name) {
    code... to handle the exception
} finally {
    code... to run after the try or catch finishes
}
```

CSE331 Spring 2015

22

What finally is for

finally is used for common “must-always-run” or “clean-up” code

- Avoids duplicated code in catch branch[es] and after
- Avoids having to catch all exceptions

```
try {
    // ... write to out; might throw exception
} catch (IOException e) {
    System.out.println("Caught IOException: "
        + e.getMessage());
} finally {
    out.close();
}
```

CSE331 Spring 2015

23

Outline

- General concepts about dealing with errors and failures
- Assertions: what, why, how
 - For things you believe will/should never happen
- Exceptions: what, how *in Java*
 - How to throw, catch, and declare exceptions
 - Subtyping of exceptions
 - Checked vs. unchecked exceptions
- Exceptions: *why in general*
 - For things you believe are bad and should rarely happen
 - And many other style issues
- Alternative with trade-offs: Returning special values
- Summary and review

CSE331 Spring 2015

24

Propagating an exception

```
// returns: x such that ax^2 + bx + c = 0
// throws: IllegalArgumentException if no real soln exists
double solveQuad(double a, double b, double c)
    throws IllegalArgumentException
{
    // No need to catch exception thrown by sqrt
    return (-b + sqrt(b*b - 4*a*c)) / (2*a);
}
```

Aside: How can clients know if a set of arguments to `solveQuad` is illegal?

CSE331 Spring 2015

25

Why catch exceptions locally?

Failure to catch exceptions usually violates modularity

- Call chain: `A → IntegerSet.insert → IntegerList.insert`
- `IntegerList.insert` throws some exception
 - Implementer of `IntegerSet.insert` knows how list is being used
 - Implementer of `A` may not even know that `IntegerList` exists

Method on the stack may think that it is handling an exception raised by a different call

Better alternative: catch it and throw again

- "chaining" or "translation"
- Do this even if the exception is better handled up a level
- Makes it clear to reader of code that it was not an omission

CSE331 Spring 2015

26

Exception translation

```
// returns: x such that ax^2 + bx + c = 0
// throws: NotRealException if no real solution exists
double solveQuad(double a, double b, double c)
    throws NotRealException {
    try {
        return (-b + sqrt(b*b - 4*a*c)) / (2*a);
    } catch (IllegalArgumentException e) {
        throw new NotRealException(); // "chaining"
    }
}

class NotRealException extends Exception {
    NotRealException() { super(); }
    NotRealException(String message) { super(message); }
    NotRealException(Throwable cause) { super(cause); }
    NotRealException(String msg, Throwable c) { super(msg, c); }
}
```

CSE331 Spring 2015

27

Exceptions as non-local control flow

```
void compile() {
    try {
        parse();
        typecheck();
        optimize();
        generate();
    } catch (RuntimeException e) {
        Logger.log("Failed: " + e.getMessage());
    }
}
```

- Not common – usually bad style, particularly at small scale
- Java/C++, etc. exceptions are expensive if thrown/caught
- Reserve exceptions for exceptional conditions

CSE331 Spring 2015

28

Two distinct uses of exceptions

- Failures
 - Unexpected
 - Should be rare with well-written client and library
 - Can be the client's fault or the library's
 - Usually unrecoverable
- Special results
 - Expected but not the common case
 - Unpredictable or unpreventable by client

CSE331 Spring 2015

29

Handling exceptions

- Failures
 - Usually can't recover
 - If condition not checked, exception propagates up the stack
 - The top-level handler prints the stack trace
 - Unchecked exceptions the better choice (else many methods have to declare they could throw it)
- Special results
 - Take special action and continue computing
 - Should always check for this condition
 - Should handle locally by code that knows how to continue
 - Checked exceptions the better choice (encourages local handling)

CSE331 Spring 2015

30

Don't ignore exceptions

Effective Java Tip #65: Don't ignore exceptions

Empty catch block is (common) poor style – often done to get code to compile despite checked exceptions

- Worse reason: to silently hide an error

```
try {
    readFile(filename);
} catch (IOException e) {} // silent failure
```

At a minimum, print out the exception so you know it happened

- And exit if that's appropriate for the application

```
} catch (IOException e) {
    e.printStackTrace();
    System.exit(1);
}
```

CSE331 Spring 2015

31

Outline

- General concepts about dealing with errors and failures
- Assertions: what, why, how
 - For things you believe will/should never happen
- Exceptions: what, how *in Java*
 - How to throw, catch, and declare exceptions
 - Subtyping of exceptions
 - Checked vs. unchecked exceptions
- Exceptions: why *in general*
 - For things you believe are bad and should rarely happen
 - And many other style issues
- Alternative with trade-offs: Returning special values
- Summary and review

CSE331 Spring 2015

32

Informing the client of a problem

Special value:

- `null` for `Map.get`
- `-1` for `indexOf`
- `NaN` for `sqrt` of negative number

Advantages:

- For a normal-ish, common case, it “is” the result
- Less verbose clients than try/catch machinery

Disadvantages:

- Error-prone: Callers forget to check, forget spec, etc.
- Need “extra” result: Doesn't work if every result could be real
 - Example: if a map could store `null` keys
- Has to be propagated manually one call at a time

General Java style advice: Exceptions for exceptional conditions

- Up for debate if `indexOf` not-present-value is exceptional

CSE331 Spring 2015

33

Special values in C/C++/others

- For errors and exceptional conditions in Java, use exceptions!
 - But C doesn't have exceptions and some C++ projects avoid them
 - Over decades, a common idiom has emerged
 - Error-prone but you can get used to it ☹
 - Affects how you read code
 - Put “results” in “out-parameters”
 - Result is a boolean (int in C) to indicate success or failure
- ```
type result;
if(!computeSomething(&result)) { ... return 1; }
// no "exception", use result
```
- Bad, but less bad than error-code-in-global-variable

CSE331 Spring 2015

34

## Outline

---

- General concepts about dealing with errors and failures
- Assertions: what, why, how
  - For things you believe will/should never happen
- Exceptions: what, how *in Java*
  - How to throw, catch, and declare exceptions
  - Subtyping of exceptions
  - Checked vs. unchecked exceptions
- Exceptions: why *in general*
  - For things you believe are bad and should rarely happen
  - And many other style issues
- Alternative with trade-offs: Returning special values
- Summary and review

CSE331 Spring 2015

35

## Exceptions: review

---

Use an **exception** when

- Used in a broad or unpredictable context
- Checking the condition is feasible

Use a **precondition** when

- Checking would be prohibitive
  - E.g., requiring that a list be sorted
- Used in a narrow context in which calls can be checked

Use a **special value** when

- It is a reasonable common-ish situation
- Clients are likely (?) to remember to check for it

Use an **assertion** for internal consistency checks that should not fail

CSE331 Spring 2015

36

## Exceptions: review, continued

---

Use *checked* exceptions most of the time

- Static checking is helpful

But maybe avoid checked exceptions if possible for many callers to *guarantee* exception cannot occur

Handle exceptions sooner rather than later

Not all exceptions are errors

- Example: File not found

Good reference: Effective Java, Chapter 9

- A whole chapter? Exception-handling design matters!